



10" Motor Karakteristikleri / 10" Motor Features												380/415V 50Hz						
Motor Tipi Motor Type	Güç Power		Verimlilik Efficiency			Güç Faktörü Power Factor			Akım Current	Devir Sayısı Revolution	Y.V.S. Starting	Eksenel Yük Thrust Load	Kablo Kesiti Cable		Kablo Uzunluğu Cable Length		Boy Length	Ağırlık Weight
			η			Cos φ							D.O.L.	S/D	D.O.L.	S/D		
	HP	kW	4/4	3/4	2/4	4/4	3/4	2/4	I(n)	Devir/Dak RPM	kN	MM <sup>2</sup>	MM <sup>2</sup>	MM <sup>2</sup>	MM <sup>2</sup>	mm	kG	
10/100	100	75	86	88	85	0,87	0,84	0,81	150	2910	10	65	3x25	3x16	4	4 + 4	1226	268
10/110	110	81	86	88	85	0,87	0,84	0,8	166	2915	10	65	3x25	3x16	4	4 + 4	1266	283
10/125	125	92	87	88	86	0,89	0,85	0,8	181	2910	10	65	3x35	3x16	4	4 + 4	1316	298
10/150	150	110	87	88	84	0,89	0,84	0,8	220	2915	10	65	3x25	3x25	4 + 4	4 + 4	1446	341
10/175	175	129	87	89	83	0,89	0,85	0,8	255	2920	10	65	3x25	3x25	4 + 4	4 + 4	1546	370
10/200	200	147	88	89	86	0,89	0,84	0,8	290	2925	10	65	3x25	3x25	4 + 4	4 + 4	1736	408
10/225	225	165	88	89	85	0,89	0,86	0,81	325	2930	10	65	3x35	3x35	4 + 4	4 + 4	1856	429
10/250	250	185	89	90	84	0,9	0,85	0,81	355	2930	10	65	3x35	3x35	4 + 4	4 + 4	1956	472



TEKNİK ÖZELLİKLER		TECHNICAL SPECIFICATIONS	
Standart		Standart	
Motor Pompa Bağlantı Flanşı	10" Nema	Motor Pump Connection Flange	10" Nema
Koruma Sınıfı	IP 68	Protection Class	IP 68
İzolasyon Sınıfı	B	Insulation Class	B
Voltaj Toleransı	-10% / 10%	Voltage Tolerance	-10% / 10%
Çalışma Sıcaklığı	0°C - 30°C	Working Temperature	0°C - 30°C
Soğutma Akışı (Minimum)	0,1 m/s	Cooling Flow (Minimum)	0,1 m/s
Maksimum Başlatma / Saat	10	Maximum Starts / Hour	10
Kurulum	Dik Pozisyon	Assembling Type	Vertical
Eksenel Yük	65 kN	Thrust Load	65 kN

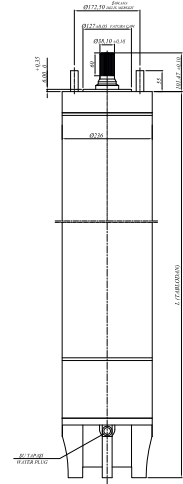

ÜRÜN ÖZELLİKLERİ		PRODUCT SPECIFICATIONS	
Freze	X20CR13	Sleeve	X20CR13
Alt Kapak	Döküm GG20	Bottom Cover	Cast Iron GG20
Üst Kapak	Döküm GG20	Upper Bracket	Cast Iron GG20
Tahrik Yatağı	Döküm GG20	Limitation Bearing	Cast Iron GG20
Bobin Teli	PP Bobin Teli	Winding Wire	PP Winding Wire
Mekanik Salmastra	SIC/SIC/V	Mechanical Seal	SIC/SIC/V
Eksenel Yatak	Karbon	Thrust Bearing	Graphite
Stator	24 Ankuş	Stator	24 Slots
Çıkış Kablosu	PVC Yassı Kablo	Outlet Cable	PVC Flat Cable - Blue
Mil	X20CR13	Shaft	X20CR13