6"

6" Motor Karakteristikleri / 6" Motor Features																380/415V 50Hz	
Motor Tipi Motor Type	Güç Power		Verimlilik Efficiency			Güç Faktörü / Power Factor			Akım Current	Devir Sayısı Revolution	Y.V.S. Starting	Eksenel Yük Thrust Load	Kablo Kesiti Cable		Kablo Uzunluğu Cable Lenght		Boy Lenght	Ağırlık Weight
			η			Cos φ							D.O.L.	S/D	D.O.L.	S/D		
	HP	kW	4/4	3/4	2/4	4/4	3/4	2/4	I(n)	Devir/Dak RPM		kN	мм²	мм²	мм²	мм²	mm	kG
6/4	4	3	78	79	70	0,84	0,81	0,72	7,5	2860	20	22	3x4	3x4	4	4 + 4	608	50
6/6	6	4,5	80	81	77	0,83	0,81	0,72	11	2860	20	22	3x4	3x4	4	4 + 4	628	53
6/7,5	7,5	5,5	80	81	75	0,84	0,82	0,76	13	2865	20	22	3x4	3x4	4	4 + 4	658	56
6/10	10	7,5	80	82	75	0,82	0,76	0,75	17,5	2870	20	22	3x4	3x4	4	4 + 4	728	65
6/12,5	12,5	9	82	83	79	0,83	0,78	0,74	20,5	2880	20	25	3x4	3x4	4	4 + 4	768	68
6/15	15	11	82	83	77	0,81	0,78	0,71	25	2870	20	25	3x4	3x4	4	4 + 4	812	75
6/17,5	17,5	13	82	84	80	0,82	0,77	0,68	29	2875	20	25	3x4	3x4	4	4 + 4	852	78
6/20	20	15	83	85	78	0,84	0,78	0,74	32	2870	20	25	3x4	3x4	4	4 + 4	922	88
6/25	25	18,5	83	85	79	0,8	0,79	0,75	42	2870	20	25	3x6	3x4	4	4 + 4	1002	96
6/30	30	22	83	86	79	0,82	0,79	0,74	51	2860	20	25	3x10	3x4	4	4 + 4	1022	100
6/35	35	26	84	86	83	0,83	0,8	0,79	56	2860	20	25	3x10	3x6	4	4 + 4	1082	107
6/40	40	30	84	86	81	0,85	0,81	0,74	63	2840	20	25	3x10	3x6	5	5 + 5	1122	113
6/50	50	37	85	86	81	0,84	0,81	0,84	80	2850	20	28	3x16	3x6	5	5 + 5	1262	127

TEKNİK ÖZELLİKLER		TECHNICAL SPECIFICATIONS	
Standart		Standart	
Motor Pompa Bağlantı Flanşı	6" Nema	Motor Pump Connection Flange	6" Nema
Koruma Sınıfı	IP 68	Protection Class	IP 68
İzolasyon Sınıfı	B	Insulation Class	B
Voltaj Toleransı	-10% / 10%	Voltage Tolerance	-10% / 10%
Çalışma Sıcaklığı	0°C - 30°C	Working Temprature	0°C - 30°C
Soğutma Akışı (Minimum)	0,1 m/s	Cooling Flow (Minimum)	0,1 m/s
Maksimum Başlatma / Saat	20	Maximum Starts / Hour	20
Kurulum	Dik Pozisyon	Assemblying Type	Vertical
Eksenel Yük	4HP - 10 HP / 22 kN 12,5 HP - 40 HP / 25 kN 50 HP / 28 kN	Thrust Load	4HP - 10 HP / 22 kN 12,5 HP - 40 HP / 25 kN 50 HP / 28 kN

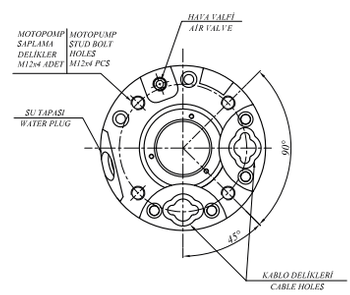
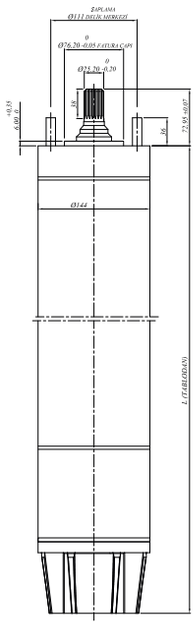
ÜRÜN ÖZELLİKLERİ		PRODUCT SPECIFICATIONS	
Freze	X20CR13	Sleeve	X20CR13
Alt Kapak	Döküm GG20	Bottom Cover	Cast Iron GG20
Üst Kapak	Döküm GG20	Upper Bracket	Cast Iron GG20
Tahrik Yatağı	Döküm GG20	Limitation Bearing	Cast Iron GG20
Bobin Teli	PP Bobin Teli	Winding Wire	PP Winding Wire
Mekanik Salmastra	SIC/SIC/V	Mechanical Seal	SIC/SIC/V
Eksenel Yatak	Karbon	Thrust Bearing	Graphite
Stator	18 Ankuş	Stator	18 Slots
Çıkış Kablosu	PVC Yassı Kablo	Outlet Cable	PVC Flat Cable - Blue
Mil	X20CR13	Shaft	X20CR13