


8" Motor Karakteristikleri / 8" Motor Features													380/415V 50Hz					
Motor Tipi Motor Type	Güç Power		Verimlilik Efficiency			Güç Faktörü Power Factor			Akım Current	Devir Sayısı Revolution	Y.V.S. Starting	Eksenel Yük Thrust Load	Kablo Kesiti Cable		Kablo Uzunluğu Cable Length		Boy Length	Ağırlık Weight
	HP	kW	η			Cos φ							D.O.L.	S/D	D.O.L.	S/D		
			4/4	3/4	2/4	4/4	3/4	2/4	I(n)	Devir/Dak RPM	kN	MM ²					MM ²	MM ²
8/30	30	22	82	81	79	0,85	0,84	0,77	50	2880	15	40	3x10	3x6	4	4 + 4	896	131
8/40	40	30	83	82	81	0,87	0,82	0,80	62	2880	15	40	3x10	3x10	4	4 + 4	956	149
8/50	50	37	85	84	82	0,87	0,84	0,80	76	2885	15	40	3x10	3x10	4	4 + 4	1026	161
8/60	60	45	86	85	82	0,87	0,84	0,80	90	2885	15	40	3x16	3x10	4	4 + 4	1076	170
8/75	75	55	86	85	84	0,87	0,85	0,81	112	2885	15	40	3x16	3x10	4	4 + 4	1156	186
8/80	80	59	88	89	85	0,87	0,85	0,80	117	2870	15	40	3x16	3x10	4	4 + 4	1166	189
8/85	85	63	87	85	84	0,87	0,85	0,80	126	2875	15	40	3x25	3x10	4	4 + 4	1196	194
8/90	90	66	88	89	86	0,87	0,84	0,80	131	2885	15	40	3x25	3x10	4	4 + 4	1266	209
8/95	95	70	87	88	85	0,87	0,85	0,80	141	2890	15	40	3x25	3x10	4	4 + 4	1296	213
8/100	100	75	88	89	86	0,87	0,84	0,81	147	2890	15	40	3x25	3x16	4	4 + 4	1336	224
8/110	110	81	88	89	85	0,87	0,84	0,81	161	2900	10	40	3x25	3x16	4	4 + 4	1426	242
8/125	125	92	88	89	86	0,87	0,85	0,81	182	2900	10	55	3x16	3x16	4 + 4	4 + 4	1536	263

TEKNİK ÖZELLİKLER		TECHNICAL SPECIFICATIONS	
Standart		Standart	
Motor Pompa Bağlantı Flanşı	8" Nema	Motor Pump Connection Flange	8" Nema
Koruma Sınıfı	IP 68	Protection Class	IP 68
İzolasyon Sınıfı	B	Insulation Class	B
Voltaj Toleransı	-10% / 10%	Voltage Tolerance	-10% / 10%
Çalışma Sıcaklığı	0°C - 30°C	Working Temperature	0°C - 30°C
Soğutma Akışı (Minimum)	0,1 m/s	Cooling Flow (Minimum)	0,1 m/s
Maksimum Başlatma / Saat	15	Maximum Starts / Hour	15
Kurulum	Dik Pozisyon	Assembling Type	Vertical
Eksenel Yük	30HP - 110 HP / 40 kN 125 HP / 55 kN	Thrust Load	30HP - 110 HP / 40 kN 125 HP / 55 kN



ÜRÜN ÖZELLİKLERİ		PRODUCT SPECIFICATIONS	
Freze	X20CR13	Sleeve	X20CR13
Alt Kapak	Döküm GG20	Bottom Cover	Cast Iron GG20
Üst Kapak	Döküm GG20	Upper Bracket	Cast Iron GG20
Tahrik Yatağı	Döküm GG20	Limitation Bearing	Cast Iron GG20
Bobin Teli	PP Bobin Teli	Winding Wire	PP Winding Wire
Mekanik Salmastra	SIC/SIC/V	Mechanical Seal	SIC/SIC/V
Eksenel Yatak	Karbon	Thrust Bearing	Graphite
Stator	24 Ankuş	Stator	24 Slots
Çıkış Kablosu	PVC Yassı Kablo	Outlet Cable	PVC Flat Cable - Blue
Mil	X20CR13	Shaft	X20CR13

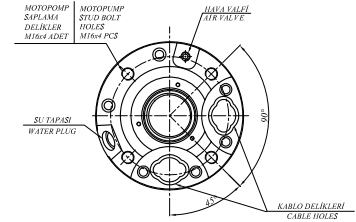